


BULL DOG® Series Stud Driver

The **BULL DOG®** is built for rugged use on impact wrenches.

Incorporating the Titan "loose plunger" design it assures an easy release from the driven stud, reducing the risk of pulling the stud back out of the casting.

Made of special alloy steels and heat treated to optimum levels, the **BULL DOG®** definitely stands up under the extreme vibration of impact wrenches.

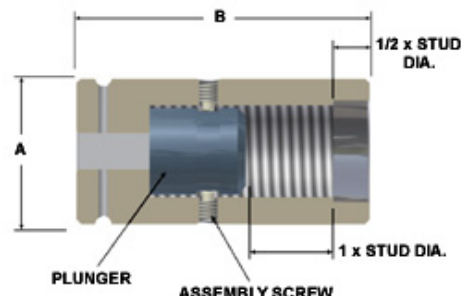

Part numbers – Dimensions

metric Sizes					
Square Drive	Stud Size	Part number	A DIA. ±0.8 mm	B O.A.L ±1.6 mm	Weight kg
3/8"	M6 x 1.00	4MB-01-6	22	49	0.14
	M7 x 1.00	4MB-03-6	22	49	0.14
	M8 x 1.25	5MB-04-6	22	52.6	0.14
	M8 x 1.00	5MB-05-6	22	52.6	0.14
	M10 x 1.50	6MB-06-6	22	55.6	0.18
	M10 x 1.25	6MB-07-6	22	55.6	0.18
1/2"	M6 x 1.00	4MB-01-8	31.8	66.7	0.23
	M7 x 1.00	4MB-03-8	31.8	66.7	0.23
	M8 x 1.25	5MB-04-8	31.8	66.7	0.23
	M8 x 1.00	5MB-05-8	31.8	66.7	0.23
	M10 x 1.50	6MB-06-8	31.8	66.7	0.23
	M10 x 1.25	6MB-07-8	31.8	66.7	0.23
	M12 x 1.75	8MB-08-8	31.8	74.6	0.32
	M12 x 1.25	8MB-09-8	31.8	74.6	0.32
	M14 x 2.00	9MB-10-8	31.8	93.7	0.55
	M14 x 1.50	9MB-11-8	31.8	93.7	0.55
	M16 x 2.00	10MB-12-8	31.8	93.7	0.55
	M16 x 1.50	10MB-13-8	31.8	93.7	0.55
	M18 x 2.50	12MB-14-8	31.8	93.7	0.55
	M18 x 1.50	12MB-15-8	31.8	93.7	0.55
	M20 x 2.50	12MB-16-8	31.8	93.7	0.55
M20 x 1.50	12MB-17-8	31.8	93.7	0.55	

metric Sizes					
Square Drive	Stud Size	Part number	A DIA. ±0.8 mm	B O.A.L. ±1.6 mm	Weight kg
3/4"	M12 x 1.75	8MB-01-12	49.2	106.4	1.1
	M12 x 1.25	8MB-02-12	49.2	106.4	1.1
	M14 x 2.00	9MB-03-12	49.2	106.4	1.1
	M14 x 1.50	9MB-04-12	49.2	106.4	1.1
	M16 x 2.00	10MB-05-12	49.2	106.4	1.1
	M16 x 1.50	10MB-06-12	49.2	106.4	1.1
	M18 x 2.50	12MB-07-12	49.2	106.4	1.1
	M18 x 1.50	12MB-08-12	49.2	106.4	1.1
	M20 x 2.50	12MB-09-12	49.2	106.4	1.0
	M20 x 1.50	12MB-10-12	49.2	106.4	1.0
	M22 x 2.50	14MB-11-12	49.2	119.1	1.4
	M22 x 1.50	14MB-12-12	49.2	119.1	1.4
	M24 x 3.00	16MB-13-12	49.2	119.1	1.3
	M24 x 2.00	16MB-14-12	49.2	119.1	1.3
	M27 x 3.00	16MB-15-12	49.2	119.1	1.3
	M27 x 2.00	16MB-16-12	49.2	119.1	1.3
	M30 x 3.50	18MB-17-12	58.7	130.2	2.1
	M30 x 2.00	18MB-18-12	58.7	130.2	2.1
M33 x 3.50	20MB-19-12	58.7	130.2	2.1	
M33 x 2.00	20MB-20-12	58.7	130.2	2.1	
1"	M18 x 2.50	12MB-01-16	61.9	138.1	3.2
	M18 x 1.50	12MB-02-16	61.9	138.1	3.2
	M20 x 2.50	12MB-03-16	61.9	138.1	3.2
	M20 x 1.50	12MB-04-16	61.9	138.1	3.2
	M22 x 2.50	14MB-05-16	61.9	138.1	3.2
	M22 x 1.50	14MB-06-16	61.9	138.1	3.2
	M24 x 3.00	16MB-07-16	61.9	138.1	2.9
	M24 x 2.00	16MB-08-16	61.9	138.1	2.9
	M27 x 3.00	16MB-09-16	61.9	138.1	2.9
	M27 x 2.00	16MB-10-16	61.9	138.1	2.9
	M30 x 3.50	18MB-11-16	61.9	138.1	2.7
	M30 x 2.00	18MB-12-16	61.9	138.1	2.7
	M33 x 3.50	20MB-13-16	61.9	138.1	2.7
	M33 x 2.00	20MB-14-16	61.9	138.1	2.7

inch Sizes					
Square Drive	Stud Size	Part number	A DIA. ±0.8 mm	B O.A.L. ±1.6 mm	Weight kg
3/8"	1/4"-20	4B-20-6	22	49	0.14
	1/4"-28	4B-28-6	22	49	0.14
	5/16"-18	5B-18-6	22	52.6	0.14
	5/16"-24	5B-24-6	22	52.6	0.14
	3/8"-16	6B-16-6	22	55.6	0.18
	3/8"-24	6B-24-6	22	55.6	0.18
1/2"	1/4"-20	4B-20-8	31.8	66.7	0.23
	1/4"-28	4B-28-8	31.8	66.7	0.23
	5/16"-18	5B-18-8	31.8	66.7	0.23
	5/16"-24	5B-24-8	31.8	66.7	0.23
	3/8"-16	6B-16-8	31.8	66.7	0.23
	3/8"-24	6B-24-8	31.8	66.7	0.23
	7/16"-14	7B-14-8	31.8	74.6	0.32
	7/16"-20	7B-20-8	31.8	74.6	0.32
	1/2"-13	8B-13-8	31.8	74.6	0.32
	1/2"-20	8B-20-8	31.8	74.6	0.32
	9/16"-12	9B-12-8	31.8	93.7	0.5
	9/16"-18	9B-18-8	31.8	93.7	0.5
	5/8"-11	10B-11-8	31.8	93.7	0.5
	5/8"-18	10B-18-8	31.8	93.7	0.5
	3/4"-10	12B-10-8	31.8	93.7	0.5
	3/4"-16	12B-16-8	31.8	93.7	0.5
3/4"	1/2"-13	8B-13-12	49.2	106.4	1.1
	1/2"-20	8B-20-12	49.2	106.4	1.1
	9/16"-12	9B-12-12	49.2	106.4	1.1
	9/16"-18	9B-18-12	49.2	106.4	1.1
	5/8"-11	10B-11-12	49.2	106.4	1.1
	5/8"-18	10B-18-12	49.2	106.4	1.1
	3/4"-10	12B-10-12	49.2	106.4	1.0
	3/4"-16	12B-16-12	49.2	106.4	1.0
	7/8"-9	14B-9-12	49.2	119.1	1.4
	7/8"-14	14B-14-12	49.2	119.1	1.4
	1"-8	16B-8-12	49.2	119.1	1.3
	1"-12	16B-12-12	49.2	119.1	1.3
	1"-14	16B-14-12	49.2	119.1	1.3
	1-1/8"-7	18B-7-12	58.7	130.2	2.1
	1-1/8"-8	18B-8-12	58.7	130.2	2.1
	1-1/8"-12	18B-12-12	58.7	130.2	2.1
	1-1/4"-7	20B-7-12	58.7	130.2	2.0
	1-1/4"-8	20B-8-12	58.7	130.2	2.0

inch Sizes					
Square Drive	Stud Size	Part number	A DIA. ±0.8 mm	B O.A.L. ±1.6 mm	Weight kg
1"	3/4"-10	12B-10-16	61.9	138.1	2.9
	3/4"-16	12B-16-16	61.9	138.1	2.9
	7/8"-9	14B-9-16	61.9	138.1	2.9
	7/8"-14	14B-14-16	61.9	138.1	2.9
	1"-8	16B-8-16	61.9	138.1	2.8
	1"-12	16B-12-16	61.9	138.1	2.8
	1"-14	16B-14-16	61.9	138.1	2.8
	1-1/8"-7	18B-7-16	61.9	138.1	2.8
	1-1/8"-8	18B-8-16	61.9	138.1	2.8
	1-1/8"-12	18B-12-16	61.9	138.1	2.8
	1-1/4"-7	20B-7-16	61.9	138.1	2.7
	1-1/4"-8	20B-8-16	61.9	138.1	2.7
	1-1/4"-12	20B-12-16	61.9	138.1	2.7
	1-3/8"-6	22B-6-16	61.9	138.1	2.6
	1-3/8"-8	22B-8-16	61.9	138.1	2.6
	1-3/8"-12	22B-12-16	82.6	174.7	2.6
	1-1/2"-6	24B-6-16	82.6	174.7	5.7
	1-1/2"-8	24B-8-16	82.6	174.7	5.7
	1-1/2"-12	24B-12-16	82.6	174.7	5.7
	1-5/8"-8	26B-8-16	82.6	174.7	5.5
	1-3/4"-5	28B-5-16	82.6	174.7	5.3
	1-3/4"-8	28B-8-16	82.6	174.7	5.3
	1-3/4"-12	28B-12-16	82.6	174.7	5.3
	1-7/8"-8	30B-8-16	82.6	174.7	5.2
	1-7/8"-12	30B-12-16	82.6	174.7	5.2
	2"-4-1/2	32B-4.5-16	82.6	174.7	5.0
	2"-8	32B-8-16	82.6	174.7	5.0
	2"-12	32B-12-16	82.6	174.7	5.0

The 3/8" and 1/2" female squares are equipped with a plain hole in one side for pin lock on male squares, and have a setscrew in the other side.

The 3/4", 1" and 1-1/2" female squares are equipped with a cross pin and "O"-Ring.

Larger sizes quoted on request.



We recommend our Stud Removers **ROLL GRIP®** to remove studs M5 – M100 and 1/4" – 4"